

Safetop Fencing Panels

Panel Features

Triangular beams at the top and bottom of the panel provide additional rigidity.

"Spike-free" panel design

3.0m wide panels, reducing installation & post costs by up to 20% when compared to 2.50m wide panels

Range of heights available from 900mm to 1800mm

Produced from Ø5.00mm Galvanised core wire to BS EN 10244-2:2009 class D


"Cut-outs" on profiled section allow easy installation onto square box-section posts



*Nominal diameter after Polyester Powder Coating

Applications

- Schools & Nurseries
- Play areas
- Commercial & Industrial Sites
- Residential areas
- Sports facilities
- Retail areas
- Pedestrian & Passenger demarcation

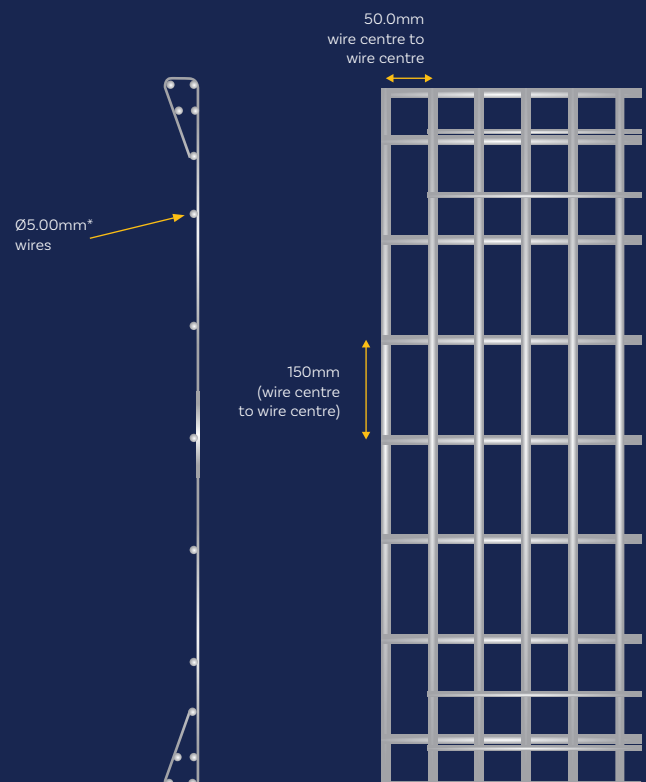


Safetop® Fencing Panels

5.00mm* vertical wires &
5.00mm* horizontal wires

Panel Dimensions (h x w)	Pallet Quantities	Approx Panel Weight (kg)
900mm x 3005mm	30	15.00
1200mm x 3005mm	30	17.90
1500mm x 3005mm	30	20.90
1800mm x 3005mm	30	24.00

Panel Finishes Available

In addition to the standard Galvanised wire finish (typically 80-100g/m² of Zinc prior to Welding / fabrication) all panels can be offered with triple coat anti-corrosion architectural finish consisting of Galvanised wire+ Zinc Phosphate pre-treatment+ 100 micron Polyester coating, to give long lasting protection against the elements.

			
RAL 6005 Moss Green	RAL 9005 Jet Black	RAL 7016 Anthracite Grey	RAL 9010 Pure White

A wide range of additional colours are available, please contact the Sales Office for further details.

Siddall & Hilton Products Ltd
Birds Royd Lane
Brighouse HD6 1LT
West Yorkshire, England

Handling & Storage

The Safetop wire mesh panels should be stored in a dry, well-ventilated area away from any sources of moisture or humidity. They should be stored flat and supported on a level surface to prevent bending, warping, or deformation.

